

ISUZU Brand (700P) outdoor advertising truck prices



Production Name: Mobile LED truck
Production brand: ISUZU brand
Drive direction: Left hand drive
Production model: CSC5070XXC
Type of fuel: Diesel
LED Screen size(Left and size):
5120*2240 mm
Control system: LINSN
Gearbox: MLD 6 Forward Gear and 1
Reverse
Engine model: 4HK1-TCG40
Spray Color: Any Color



Main Specification

Vehicles Parameters

Dimensions	Product Model:	CSC5070XXC
	Overall dimensions(mm)	7100 X 2020 X 3615
	GVW(kg)	8000
	Wheelbase/mm	3360/3815
	Approach/Departure Angle/°	21/13
	Front/Rear Overhang/mm	1110/2395
Cab	Cab Capacity	Single row, left steering wheel
	Air Conditioner	Yes
Chassis	Chassis model	QL11009HARY
	Brand	ISUZU brand with 700P series
	Driven Mode	4x2, LHD
	Emission standard	Euro IV
	Front/ Rear track base(mm)	1680/1650
	Tyre	8.25-20
	Fuel Type	Diesel
	Gear Box	MLD 6 gear transmission, air conditioning drive, oil brake vacuum pump, the bridge can open the frame section
	Taxi driver	MLD 6 gear transmission, air conditioning drive, oil brake vacuum pump, the bridge can open the frame section
	Max Speed/ km/h	110
Engine	Engine model	4HK1-TCG40
	Horsepower/HP	189
	Displacement/ml	5193
	Max Torque	510N.m
	Speed at Max Torque	2600 rpm
Detail Mobile LED truck	LED screen size (x length high) (mm)	5120 * 2240 (Left and right side)
	Height Screen Lift (m)	1.5 (left and right side)
	Pixel of LED screen pitch (mm)	P8/P6/P5/P4
	Rear P6 Full-color LED Screen size (Width × Width) (mm)	1280 × 16000 (P6 Screen)
	Generator - Kubota brand	16 Kw
	Control System of LED Screen	LINSN
Comment	Equipped with Silent generator, wooden floor, light, fan fan, skylights, computer, stereo, amplifiers and other bodybuilding facilities, and 220V external power connector outside the body.	



MOBILE LED TRUCK


Scanning mode:1/8 Scanning
 Point spacing (mm) :6
 Module pixel (point):32*32
 Module Size (mm) :192*192
 Pixel density (point /m2):27777
 Structural characteristics:Lamp drive in one
 brightness(CD/M2):≥5800
 Module weight(Kg):0.335
 Maximum current(A):6.94
 Whole screen power(W/m2): 942
 Optimal sight distance (m):≥6



Type of lamp tube:SMD3535
 Attenuation rate:≤15%
 Average time free time: ≥10 thousand hours
 Blind rate: <0.0001, The factory is 0
 Viewing angle(°):
 Level: 140°
 Vertical: 130°
 DriveIC: Constant current drive chip
 Refresh rate(HZ): ≥ 960
 Protection grade: IP65(Front)
 Gray level (Bit) :13



Tilt Sensor Installation Diagram

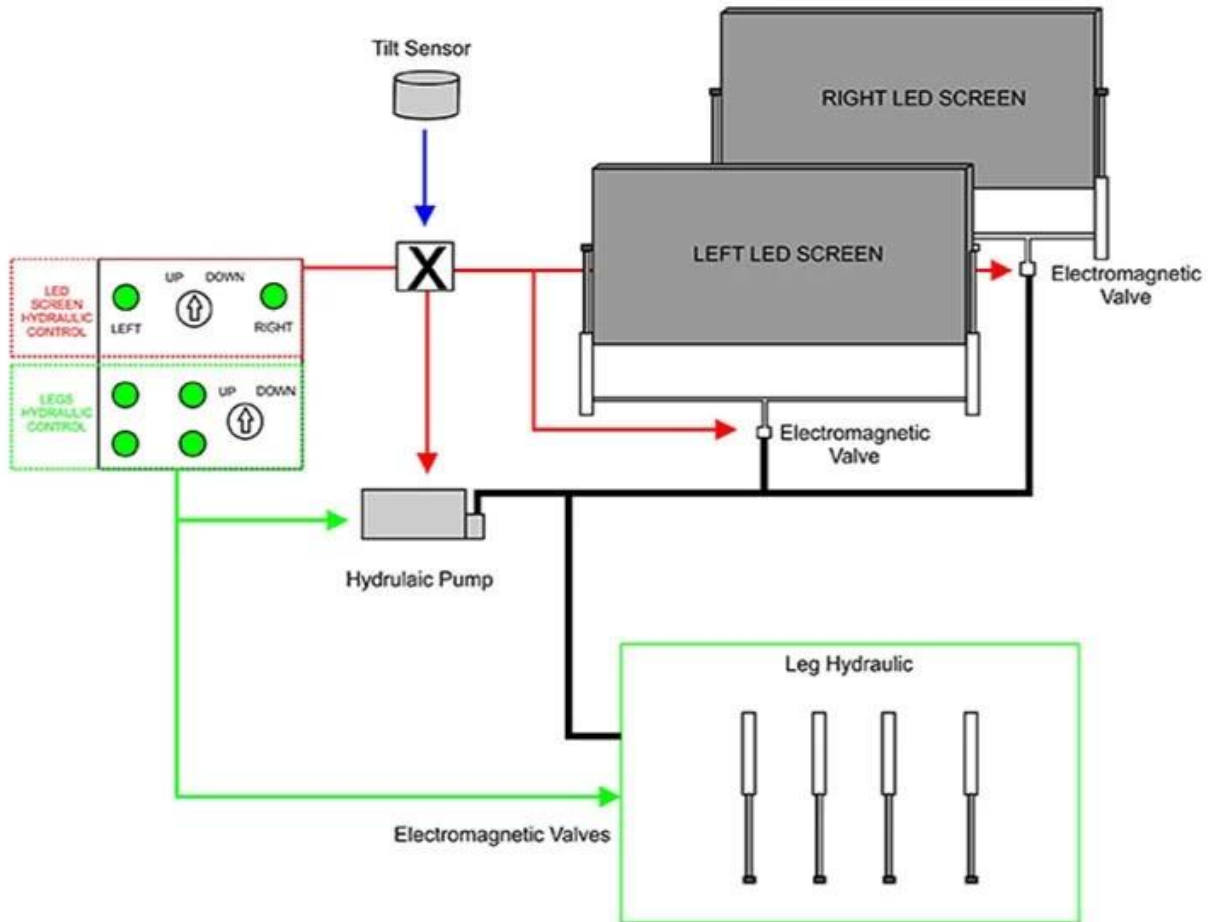



WORKSHOP DISPLAY



OUR CERTIFICATION



Why Choose Us?

1. Q: How long is the warranty period?

A: All of our trucks have one year warranty or 25000KM since you get the truck.

2. Q: What's the main market of your company?

A: We have customers all over the world and our main market is Africa, all the individuals and units are my partners who have a demand of China's high quality automobile industry product.

3. Q: How much the production capacity and supply capacity of your factory for one year?

A: This depends on your needs. 10 years of spare parts sales experience makes us have a smooth supply channels.

4. Q: Where is your factory located?

A: Our company is located in Suizhou City, Hubei Province, the Capital of Special Purpose Vehicle in China. Warmly welcome to our factory.

5. Q: The reason why you chose our company?

A: We have the abundant resources supply, professional quality inspection engineers, excellent service team, we will integrate all resources for your needs, let you experience the more cost-effective and more convenient "one-stop" procurement services, effectively reduce the purchasing cost.

PACKAGING & SHIPPING



OUR MARKET



CLIENTS INVISTING



CONTACT US

Steven.wang



Tel:+86 722 3229822



Mobile:++86 18808666258



Email: steven@chinacyalestruck.com



Skype:Truck_chengli



Whatsap:+86 18808666258



Web: www.chinacyalestruck.com



if you want to know me,
please use your phone to
scan above QR code