

# Aumark 4x2 LED P5 P6 P8



Main Specification



**MOBILE LED TRUCK**


Scanning mode:1/8 Scanning  
 Point spacing (mm) :6  
 Module pixel (point):32\*32  
 Module Size (mm) :192\*192  
 Pixel density (point /m2):27777  
 Structural characteristics:Lamp drive in one  
 brightness(CD/M2):≥5800  
 Module weight(Kg):0.335  
 Maximum current(A):6.94  
 Whole screen power(W/m2): 942  
 Optimal sight distance (m):≥6



Type of lamp tube:SMD3535  
 Attenuation rate:≤15%  
 Average time free time: ≥10 thousand hours  
 Blind rate: <0.0001, The factory is 0  
 Viewing angle(°):  
 Level: 140°  
 Vertical: 130°  
 DriveIC: Constant current drive chip  
 Refresh rate(HZ): ≥ 960  
 Protection grade: IP65(Front)  
 Gray level (Bit) :13



# Tilt Sensor Installation Diagram

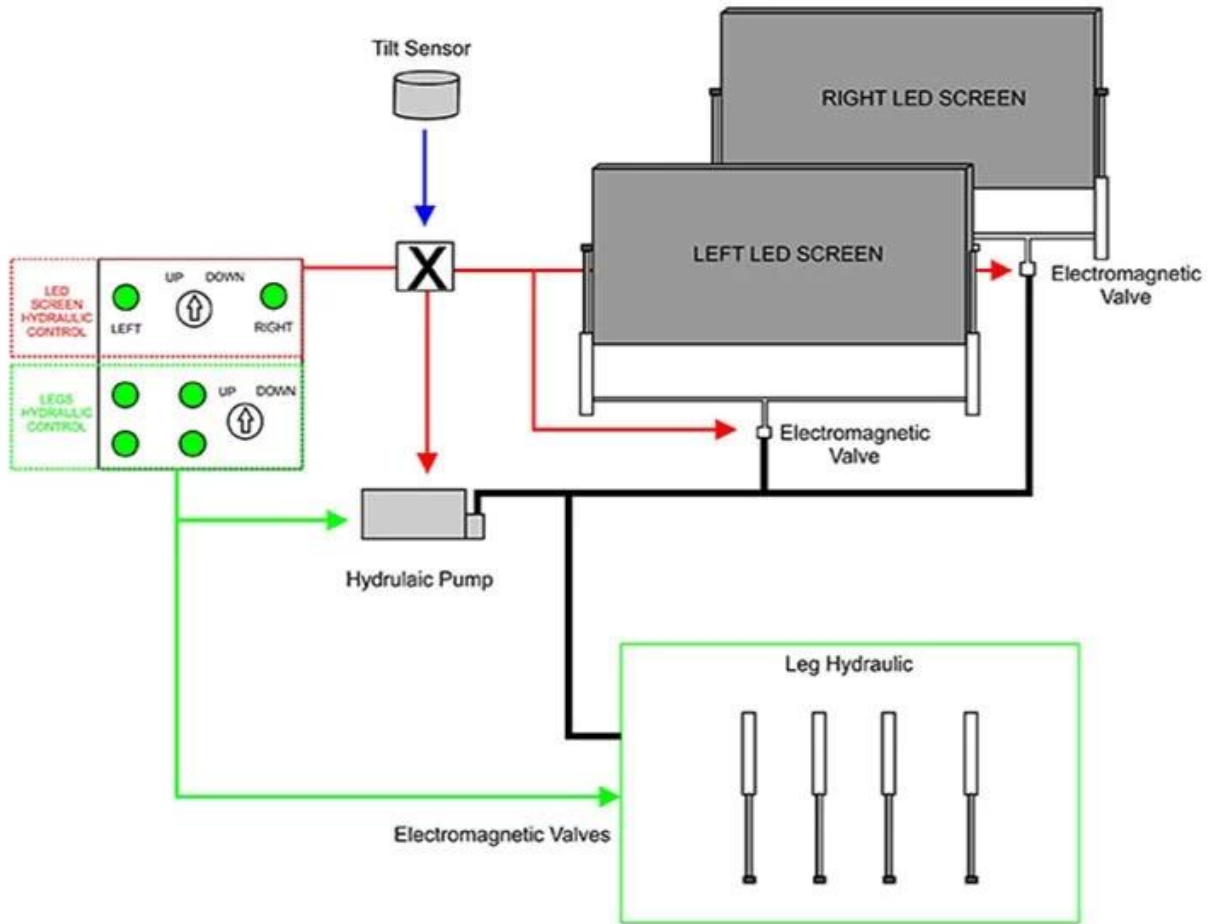





WORKSHOP DISPLAY



OUR CERTIFICATION





**Why Choose Us?**

1. 工厂占地面积 25000 亩
  2. 工厂拥有 Afrian 生产线
  3. 工厂拥有 10 条生产线
  4. 工厂拥有完善的质量管理体系
  5. 工厂拥有完善的生产管理体系
- “工厂”

**PACKAGING & SHIPPING**



OUR MARKET





CLIENTS INVISTING



CONTACT US

**Steven.wang**



Tel:+86 722 3229822



Mobile:++86 18808666258



Email: [steven@chinacyalestruck.com](mailto:steven@chinacyalestruck.com)



Skype:Truck\_chengli



Whatsap:+86 18808666258



Web: [www.chinacyalestruck.com](http://www.chinacyalestruck.com)



if you want to know me,  
please use your phone to  
scan above QR code