







- 1.
- 2.חחחחחחחחחחחחחחחחחחחחחחחח

	CLW5252JSQ3		
	25000		6X4
	12120		3
	12685		11945×2500×3750
	32/12		8500×2294×550
	3		3500∏∏1245
	18000 7000		5900 + 1300
	85		0300 1 1000
	00		L
	EQ1258KB3GJ1	ПП	nn
			10
00/00000°0	32 / 13,32 / 12		10.00-20
	8 / 13,8 / 12		1940∏
		ПП	8
<u> </u>			ļou
B210 33		5900	150
			1 2 2
	SQ8SA3		CLW
			2700
	8000		14.5
	12.5		0000/000
	4	0000000	2 4
	•		· -
		10000000000H000 0	



吊臂界面采用加强钢板,且8吨以上吊机采用U型臂,可以提高截面抗弯能力!

THE BOOM INTERFACE WITH REINFORCED STEEL PLATE, AND ABOVE 8 TONS CRANE USE U-TYPE BOOM WITH POWERFUL BENDING RESISTANCE.

液压绞车依靠碟簧和摩擦片制动,效率高且噪音低,发热量小,耐用!!

HYDRAULIC WINCH RELIES ON DISC SPRING AND FRICTION PLATE TO BRAKE, HIGH EFFICIENCY, LOW NOISE AND LOW HEAT GRNERATION;





水性油漆,更加环保。

WATER-BASED PAINT, MORE ENVIRONMENTALLY FRIENDLY.

Crane Specification

Crane model	Max Lifting quality	Max Lifting Moment	Recommended Power	H-System Max Flow Rate	H-System Rated Pressure	Oil Tank Volume	Rotation Angle	Crane Dead Weight	Install
SQ6.3SK2Q	6300KG	15.7 T.M	20 KW	40 L/MIN	20MPA	90 L	Full Gyration	2117 KG	900 MM
SQ6	2280~510	35	320~8500 7/61	12 11 10 9 8 (E) 86 6 12 4 3 2 1 0	2 -1 0	75° 8 2.50 2 Kg 6300	2900 1	3.17 8	0° 50 500 9 10

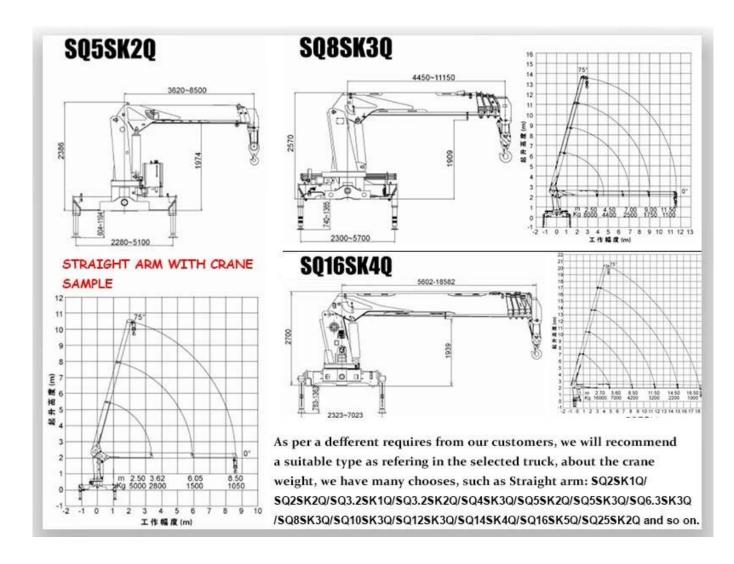

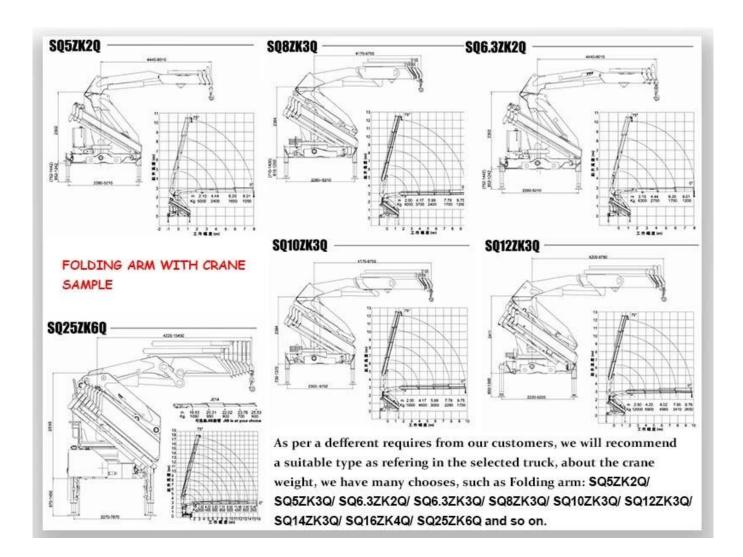





















WORKSHOP DISPLAY















- 1.00000000
- 3.0000000000000000000000
- 4.000000000









CLIENTS INVISTING







Tel:+86 722 3229822



Mobile:++86 18808666258



Email: steven@chinacyalestruck.com



Skype:Truck_chengli



Whatsap:+86 18808666258



Web: www.chinacysalestruck.com

Steven.wang



if you want to know me, please use your phone to scan above QR code