

ISUZU 100P LED p5 p6 p8



Main Specification

CSC5040XXCW ISUZU Light LED			
Kg	4475		4 x 2
Kg	4345	mm	5990×2000×2900
mm	3360		2
°	24/15	mm	
	2675×1800	Km / h	98.00
QL10403HARY			
	100P		2
	7.00-15		6
	8/6 + 5,4 / 3 + 2	mm	1504
		mm	1425
	IV		ISUZU MSB 5
		ml	KW
4JB1CN		2771	72
LED			
LED	3840 x 1700	LED	6.8 * 2 = 13.6
x mm	1.5	LED mm	6
P6 LED x mm	1280×1440 P6		OUMA25CY 25KW
	220V P6 LED		
LED			
1.			
2.			



MOBILE LED TRUCK


Scanning mode:1/8 Scanning
 Point spacing (mm) :6
 Module pixel (point):32*32
 Module Size (mm) :192*192
 Pixel density (point /m2):27777
 Structural characteristics:Lamp drive in one
 brightness(CD/M2):≥5800
 Module weight(Kg):0.335
 Maximum current(A):6.94
 Whole screen power(W/m2): 942
 Optimal sight distance (m):≥6



Type of lamp tube:SMD3535
 Attenuation rate:≤15%
 Average time free time: ≥10 thousand hours
 Blind rate: <0.0001, The factory is 0
 Viewing angle(°):
 Level: 140°
 Vertical: 130°
 DriveIC: Constant current drive chip
 Refresh rate(HZ): ≥ 960
 Protection grade: IP65(Front)
 Gray level (Bit) :13



Tilt Sensor Installation Diagram

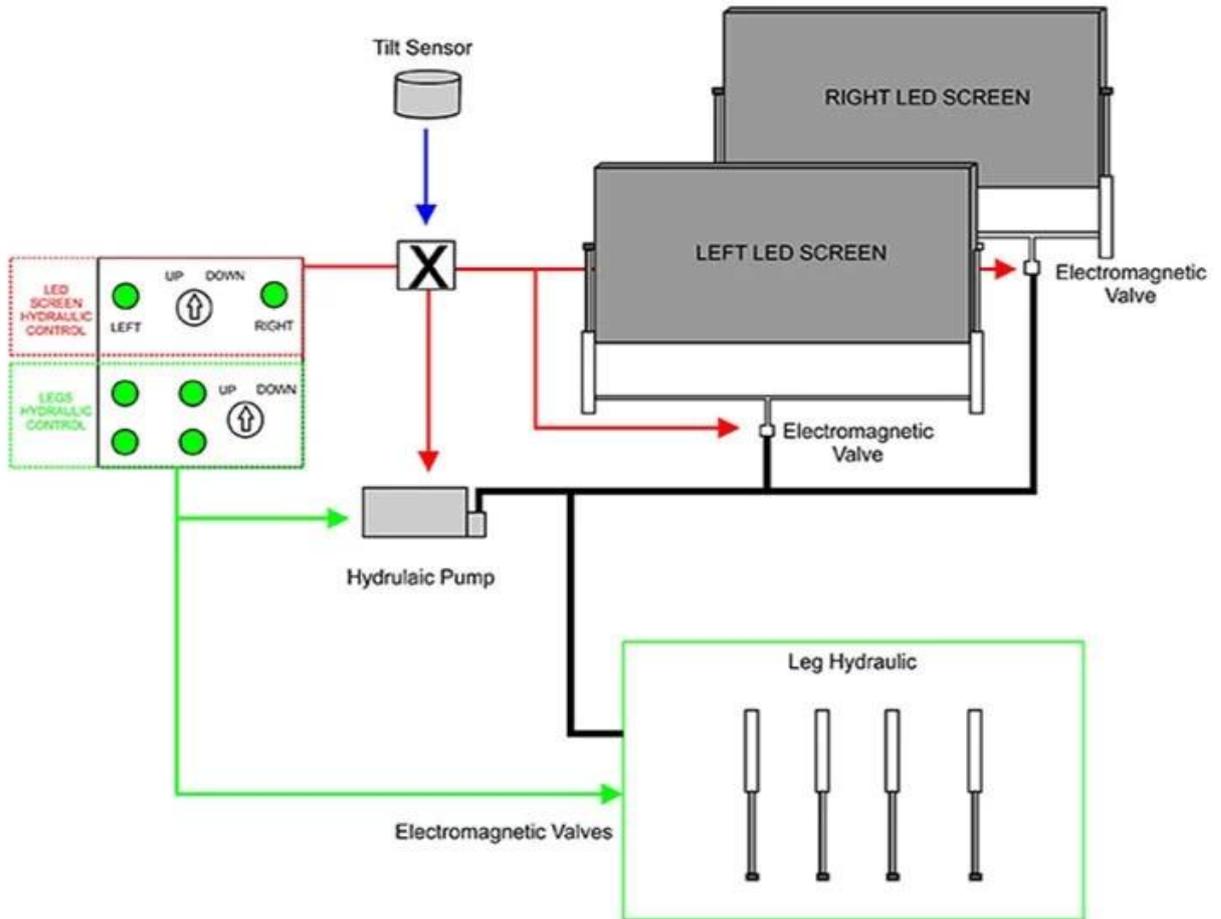



WORKSHOP DISPLAY



OUR CERTIFICATION




Why Choose Us?

1. 工厂占地面积 25000 亩
 2. 工厂拥有 Afrian 生产线
 3. 工厂拥有 10 条生产线
 4. 工厂拥有 10 条生产线
 5. 工厂拥有 10 条生产线
- “ ”

PACKAGING & SHIPPING



OUR MARKET

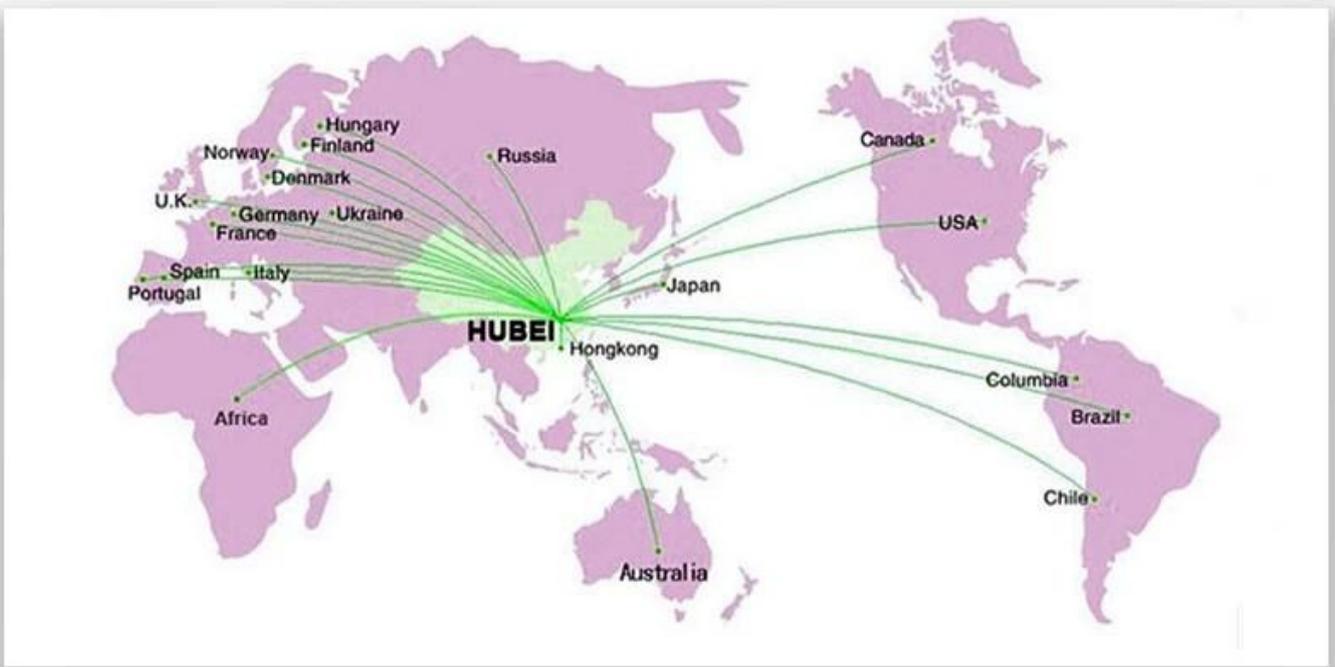

CLIENTS INVISTING



CONTACT US

Steven.wang



Tel:+86 722 3229822



Mobile:++86 18808666258



Email: steven@chinacyalestruck.com



Skype:Truck_chengli



Whatsap:+86 18808666258



Web: www.chinacyalestruck.com



if you want to know me,
please use your phone to
scan above QR code