

□□□□□□□□□□□□□□□□



Main Specification

ZQZ5021XXCA led			
Kg	1810		4x2
Kg	4950	mm	4200x1695x2405
Kg	1185		2
/°	58/21	mm	
	2	mm	2500
	885x925	Km / h	95
SC1022DB4N			
		mm	3800x1480x1810
	165 / 70R13LT		4
	- / 5	mm	1280
		mm	1290
	III		5000
		ml	KW
JL466Q4		1012	39
P8 LED			
	8KW		
	4		
	8KW		
			380V
2			
3. LED			



MOBILE LED TRUCK


Scanning mode:1/8 Scanning
 Point spacing (mm) :6
 Module pixel (point):32*32
 Module Size (mm) :192*192
 Pixel density (point /m2):27777
 Structural characteristics:Lamp drive in one
 brightness(CD/M2):≥5800
 Module weight(Kg):0.335
 Maximum current(A):6.94
 Whole screen power(W/m2): 942
 Optimal sight distance (m):≥6



Type of lamp tube:SMD3535
 Attenuation rate:≤15%
 Average time free time: ≥10 thousand hours
 Blind rate: <0.0001, The factory is 0
 Viewing angle(°):
 Level: 140°
 Vertical: 130°
 DriveIC: Constant current drive chip
 Refresh rate(HZ): ≥ 960
 Protection grade: IP65(Front)
 Gray level (Bit) :13



Tilt Sensor Installation Diagram

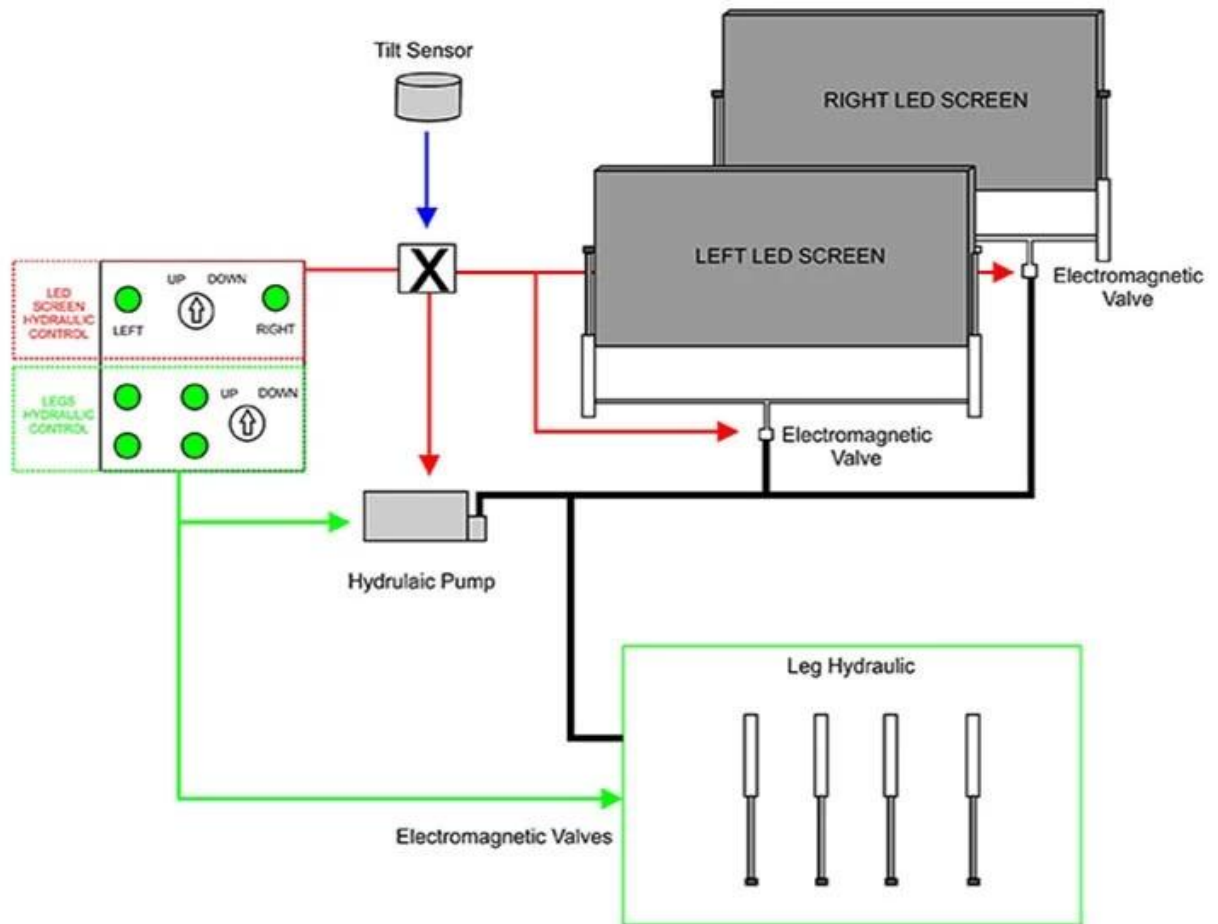



WORKSHOP DISPLAY



OUR CERTIFICATION




Why Choose Us?

- 1. LED 产品使用寿命长达 25000 小时
- 2. 产品符合 CE、RoHS、REACH 等国际标准
- 3. 产品符合 ISO 9001 质量管理体系
- 4. 产品符合 ISO 14001 环境管理体系

PACKAGING & SHIPPING



OUR MARKET

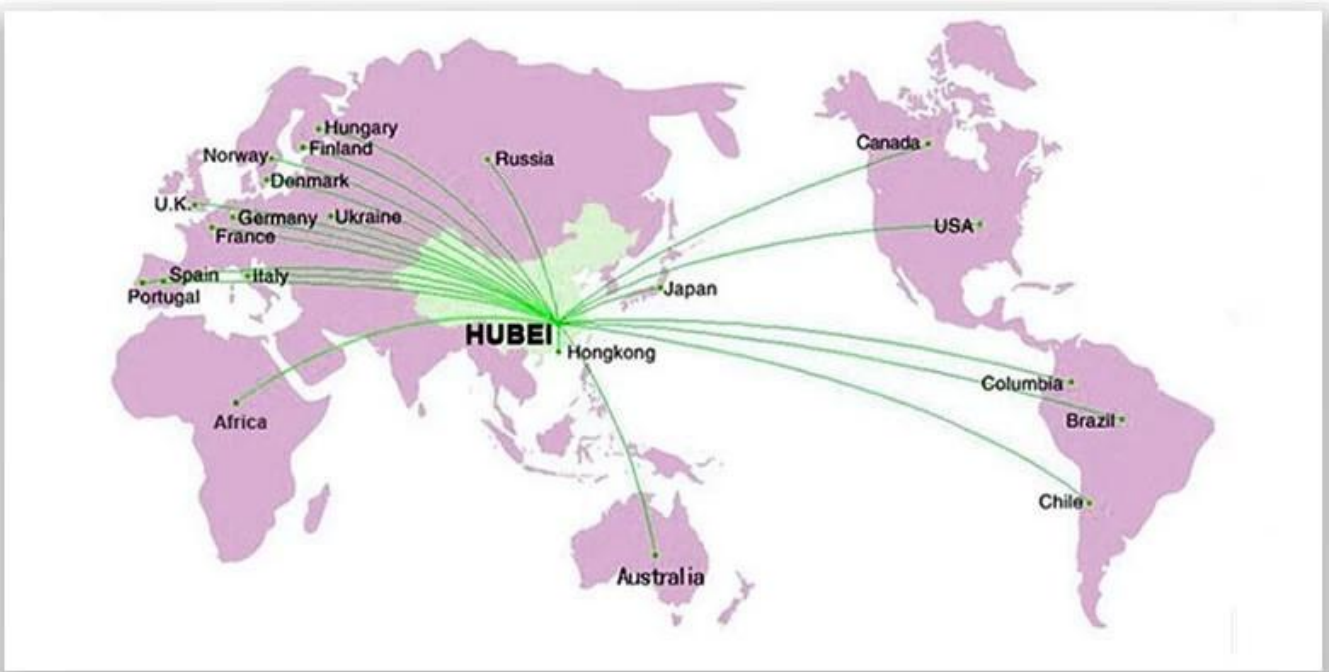

CLIENTS INVISTING



CONTACT US

Steven.wang



Tel:+86 722 3229822



Mobile:++86 18808666258



Email: steven@chinacyalestruck.com



Skype:Truck_chengli



Whatsap:+86 18808666258



Web: www.chinacyalestruck.com



if you want to know me,
please use your phone to
scan above QR code