

## Aumark 4x2 mobile LED truck in P5,P6,P8 screen supplier



Main Specification

Main specification			
Product model□name	Mobile LED Truck (Right hand drive)		
Total weight(Kg)	6395	Drive type	4 x 2
Curb weight(Kg)	4200	Overall dimension (mm)	5995×2025×2990
Wheelbase(mm)	3360	Cab seats (man)	3
Approach / departure angle(°)	23/19	Front/rear hang(mm)	1085/1550
Axle load	1710/2785	Max speed(Km/h)	95
Chassis specification			
Chassis model	BJ1049V9JEA-KA1	Manufacturer	FOTON INTERNATIONAL TRADE CO.,LTD BEIJING
Brand name	AUMARK	Number of axes	2
Tire specification	7.00-16	Tires No.	6
Leaf spring	8/9+8,4/6+7	Front track(mm)	1415
Type of fuel	Diesel	Rear track(mm)	1485
Emission standard	Euro II	Transmission	5 Forward Gear, 1 reverse gears
Remark	Single row seat, Tilttable□		
Engine model	Engine Manufacturer	Displacement(ml)	Power(KW)
YZ4102ZLQ	YangChai engine co., LTD	3432	81
Mobile LED truck specification			
LED screen size (length x high)(mm)	3840 x 1760 (Left or Right side)	Led side screen area (□)	6.8
Screen Lift Height□m)	1.5 (Left or Right side)	LED screen's pixel pitch□mm)	6
Rear screen size(length ×Width□(mm)	1280×1440	Generator	OUMA8CY (8KW)
Remark	There be equipped the Silent generator, wooden floors, lighting, ventilation fans, skylights, computers, stereos, amplifiers and other facilities within the body , and 220V external power connector outside the body. According to customers' requirements, it can be equipped the LED screen lifting system and hydraulic extenstion stage, which will be a multi-purpose truck.		





## MOBILE LED TRUCK


Scanning mode: 1/8 Scanning  
 Point spacing (mm): 6  
 Module pixel (point): 32\*32  
 Module Size (mm): 192\*192  
 Pixel density (point /m<sup>2</sup>): 27777  
 Structural characteristics: Lamp drive in one  
 brightness(CD/M<sup>2</sup>): ≥5800  
 Module weight(Kg): 0.335  
 Maximum current(A): 6.94  
 Whole screen power(W/m<sup>2</sup>): 942  
 Optimal sight distance (m): ≥6



Type of lamp tube: SMD3535  
 Attenuation rate: ≤15%  
 Average time free time: ≥10 thousand hours  
 Blind rate: <0.0001, The factory is 0  
 Viewing angle(°):  
 Level: 140°  
 Vertical: 130°  
 Drive IC: Constant current drive chip  
 Refresh rate(HZ): ≥960  
 Protection grade: IP65(Front)  
 Gray level (Bit): 13



## Tilt Sensor Installation Diagram

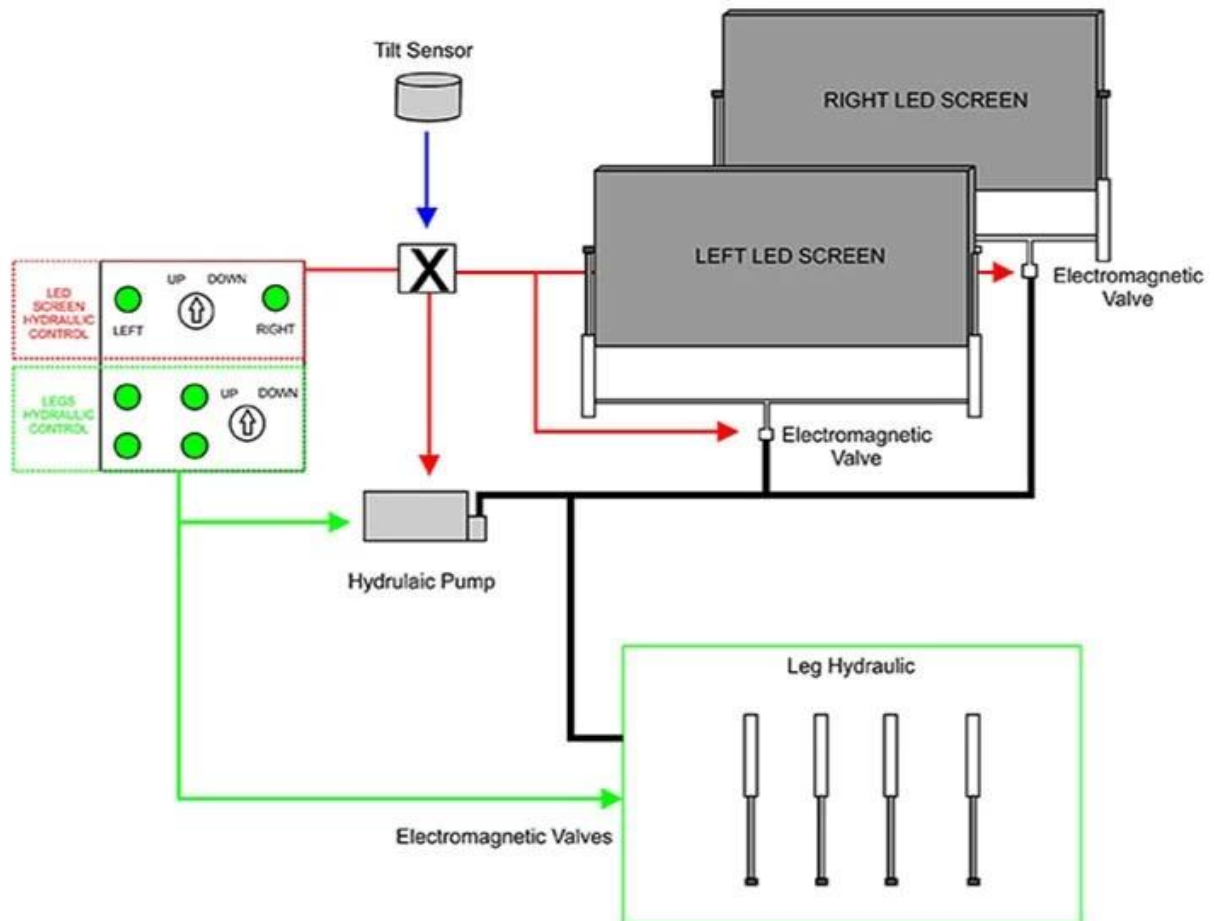

FACTORY OVERVIEW











**1. Q: How long is the warranty period?**

A: All of our trucks have one year warranty or 25000KM since you get the truck.

**2. Q: What's the main market of your company?**

A: We have customers all over the world and our main market is Africa, all the individuals and units are my partners who have a demand of China's high quality automobile industry product.

**3. Q: How much the production capacity and supply capacity of your factory for one year?**

A: This depends on your needs. 10 years of spare parts sales experience makes us have a smooth supply channels.

**4. Q: Where is your factory located?**

A: Our company is located in Suizhou City, Hubei Province, the Capital of Special Purpose Vehicle in China. Warmly welcome to our factory.

**5. Q: The reason why you chose our company?**

A: We have the abundant resources supply, professional quality inspection engineers, excellent service team, we will integrate all resources for your needs, let you experience the more cost-effective and more convenient "one-stop" procurement services, effectively reduce the purchasing cost.





## OUR MARKET





## CLIENTS INVISTING



## CONTACT US

**Steven.wang**



Tel:+86 722 3229822



Mobile:++86 18808666258



Email: [steven@chinacyalestruck.com](mailto:steven@chinacyalestruck.com)



Skype:Truck\_chengli



Whatsap:+86 18808666258



Web: [www.chinacyalestruck.com](http://www.chinacyalestruck.com)



if you want to know me,  
please use your phone to  
scan above QR code